


Bring Online Voice | SIPTrunk installeren op Yeastar P-Series Cloud Edition

1 Navigate to <https://voice.bringonline.nl/>. Open SIPTrunk account page.

2 Click on SIPTrunk

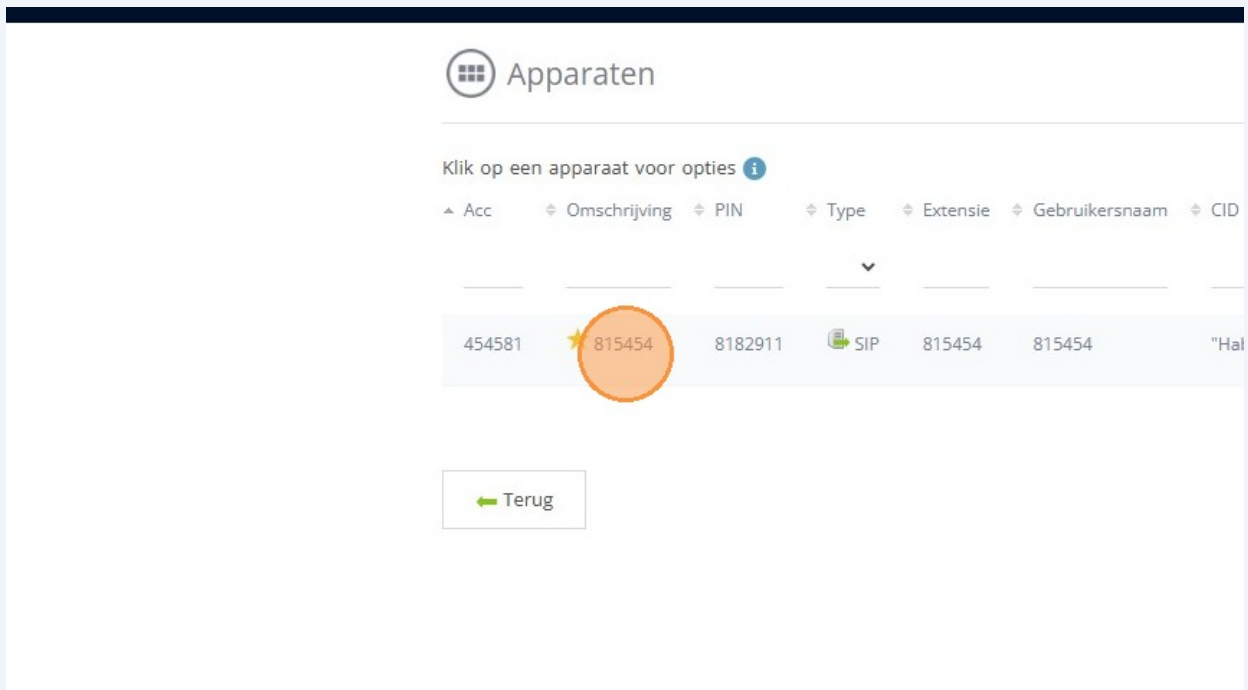

3 Click "Bewerken"

The screenshot shows the 'Apparaten' (Devices) management page. At the top, there is a header with a grid icon and the title 'Apparaten'. Below the header, there is a sub-header 'Klik op een apparaat voor opties' with an information icon. A table lists devices with columns for 'Acc', 'Omschrijving', 'PIN', 'Type', 'Extensie', and 'Gebruikersnaam'. The first row shows a device with 'Acc' 454581, 'Omschrijving' 815454 (marked with a star), 'PIN' 8182911, 'Type' SIP, 'Extensie' 815454, and 'Gebruikersnaam' 815454. Below the table, there are two buttons: 'Bewerken' (highlighted with an orange circle) and 'Callflow'. At the bottom, there is a 'Terug' (Back) button with a left-pointing arrow.

4 Click the "registration" field.


The screenshot shows the 'Authenticatie' (Authentication) configuration page. At the top, there are four unchecked checkboxes: 'Establish direct media path if possible', 'NAT intelligence', 'T38', and 'ICE ondersteuning'. Below these is the 'Authenticatie' section with an information icon. Under 'Authenticatie', there are four radio buttons: 'registration' (highlighted with an orange circle), 'ip', 'ip/port', and 'ip/user'. At the bottom, there is a 'Gebruikersnaam' field with the value '815454' and a 'Wachtwoord resetten' (Reset password) button. The status 'Geblokkeerd' (Blocked) is visible on the left.

5 Click this text field.

The screenshot shows a web form with several sections. At the top, there are three radio button options: 'ip', 'ip/port', and 'ip/user'. Below these is a 'Geblokkeerd' status indicator and a 'Gebruikersnaam' field containing '815454'. A dropdown menu is open, showing 'Wachtwoord resetten' and 'Kies bestemming' with a cursor in the latter. Below the dropdown is a 'SIP opties' section with an information icon. Underneath, there is a 'DTMF signalling mode' section with three radio button options: 'auto', 'rfc2833' (which is selected), and 'inband'.


6 Type mobile phone number (format: 31612345678)

7 Click "Wachtwoord resetten"

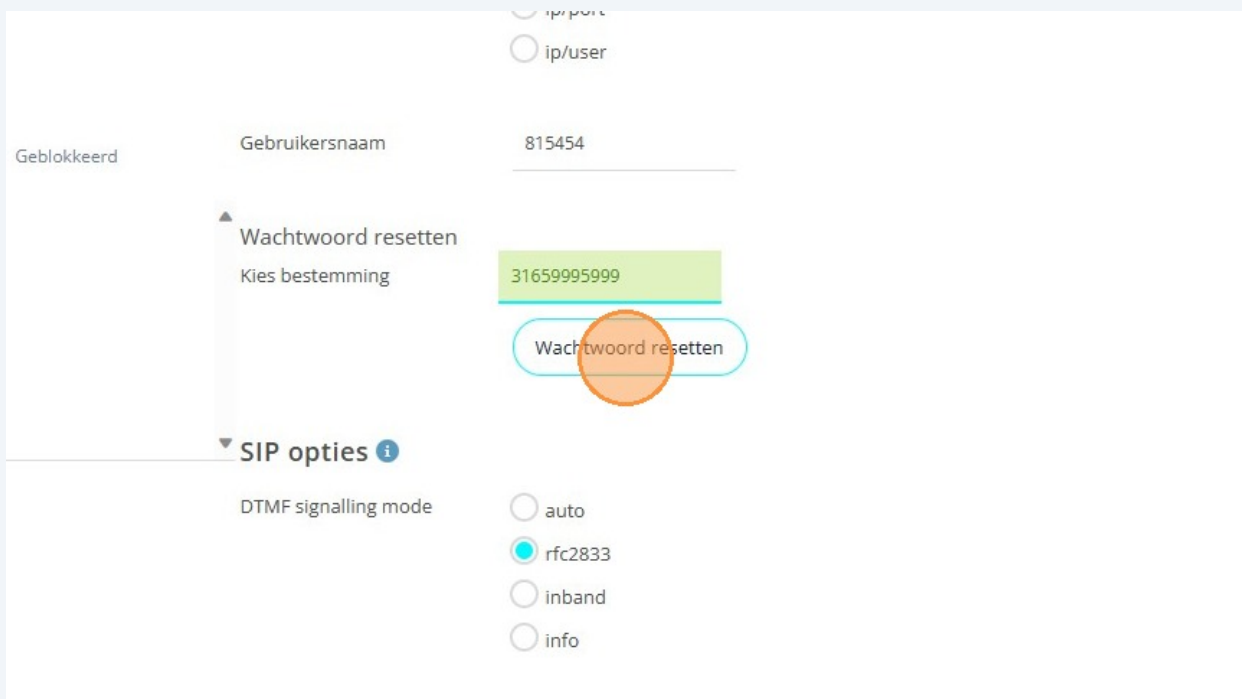


8 Switch to tab "PBX"

9 Click "Trunk"

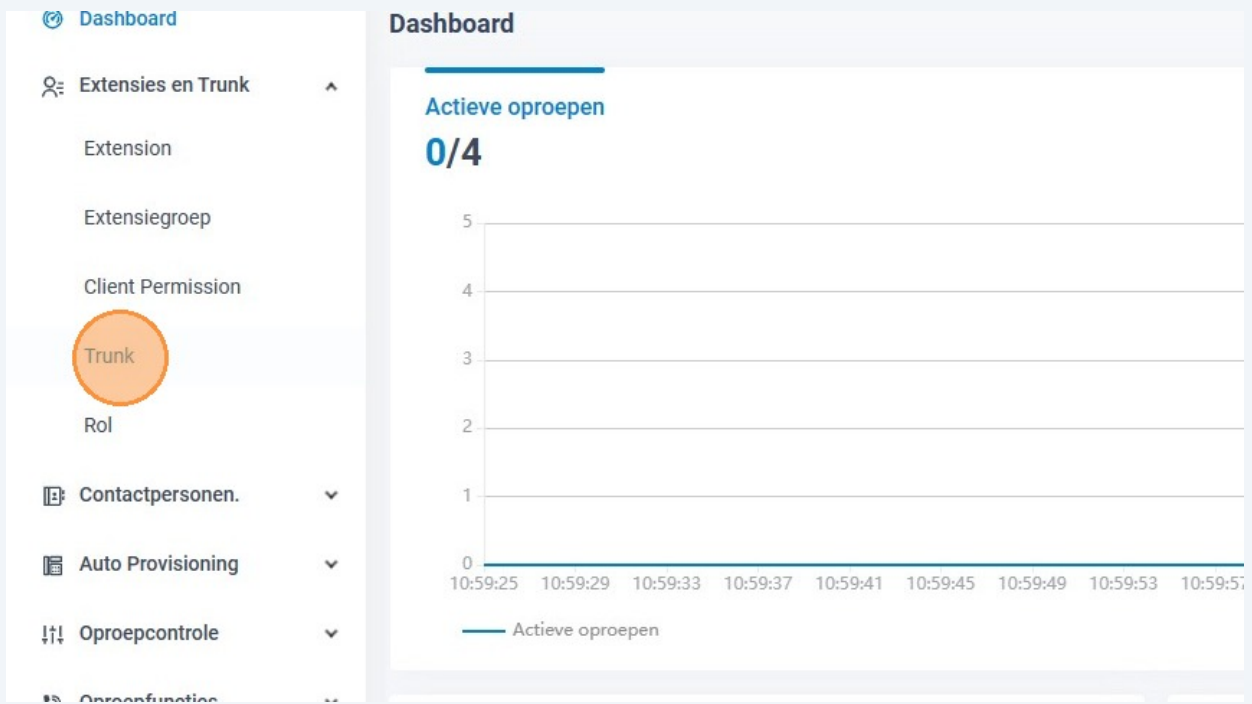

The screenshot shows the Yeastar dashboard. On the left sidebar, the 'Trunk' menu item is highlighted with an orange circle. The main content area displays a 'Dashboard' section with a title 'Actieve oproepen' and a value '0/4'. Below this is a line graph with a y-axis from 0 to 5 and an x-axis with time intervals from 10:59:25 to 10:59:57. The graph shows a flat line at 0. A legend below the graph indicates 'Actieve oproepen'.

10 Click "Toevoegen"

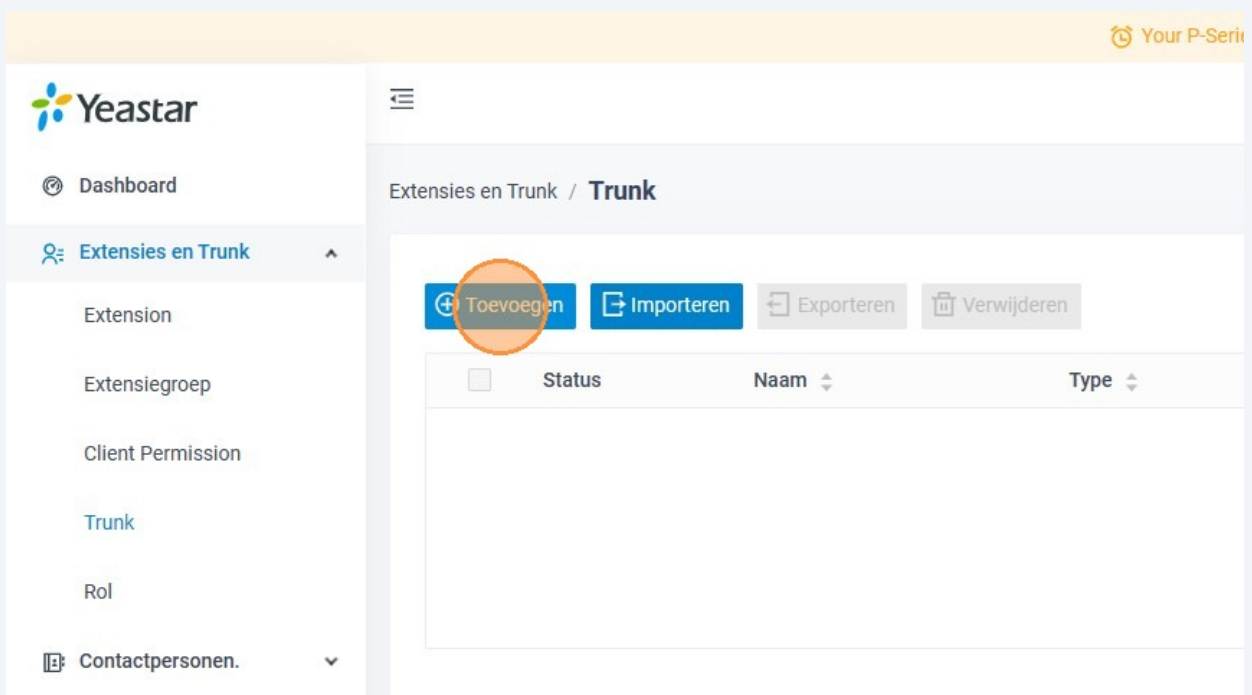

The screenshot shows the Yeastar 'Trunk' management page. The sidebar on the left has 'Trunk' highlighted in blue. The main content area has a header 'Extensies en Trunk / Trunk' and a toolbar with buttons: 'Toevoegen' (highlighted with an orange circle), 'Importeren', 'Exporteren', and 'Verwijderen'. Below the toolbar is a table with columns 'Status', 'Naam', and 'Type'. The table is currently empty.

11 Click the "Naam" field.

The screenshot shows a web application interface for managing SIP trunks. On the left is a navigation menu with items: Dashboard, Extensies en Trunk (selected), Extension, Extensiegroep, Client Permission, Trunk, Rol, Contactpersonen., Auto Provisioning, and Oproepcontrole. The main content area is titled 'Extensies en Trunk / Trunk / Toevoegen' and has four tabs: Basic (selected), Geavanceerd, DIDs/DDIs, and Inkomende nummerherkennin. Under the 'Basic' tab, there is a section titled 'Basic' with a required field '* Naam' containing an empty text input box, which is highlighted with an orange circle. Below it is a dropdown menu 'Selecteer ITSP-sjabloon' with the option 'Algemeen.' selected. Further down is a section titled 'Verzamel oproep' with a required field '* type Trunk' containing the text 'Registratie trunk'.

12 Type "Hoofdnummertab" or choose an other name for your SIPTrunk

13 Click the "Hostnaam" field.

The screenshot shows a web interface with a sidebar on the left and a main content area on the right. The sidebar contains a list of menu items: 'Trunk', 'Rol', 'Contactpersonen.', 'Auto Provisioning', 'Oproepcontrole', 'Oproepfuncties', 'Messaging', 'PBX instellingen', 'Systeem', and 'Beveiliging'. The main content area is titled 'Verzamel oproep' and contains several form fields. The 'Hostnaam' field is highlighted with an orange circle. The form fields are: 'Registratie trunk', '* Hostnaam', '* Poort' (with the value '5060'), '* Gebruikersnaam', 'Authenticatie-naam', and a checkbox labeled 'Proxy inschakelen voor uitgaande calls'.

14 Type "sip.bringon.nl" in the Hostnaam-field and "sip.bringon.nl" in the Domein-field

- 15 Navigate to the SIPTrunk settingspage and copy the username "vb. 815454"

FLUX

Apparaat bewerken

Account Bring Online (Habets)

Apparaat SIP/815454

Callflow DIDs Bel plan

Basis info

Omschrijving	815454
Type	SIP

Coc
Versl
Ac
G.7

- 16 Click the "Gebruikersnaam" field. Fill in SIPTrunk Username.

Verzamel oproep

* type Trunk
Registratie trunk

* Hostnaam sip.bringon.nl * Poort 5060


* Gebruikersnaam

Authenticatie-naam


Proxy inschakelen voor uitgaande calls

- Contactpersonen. ▾
- Auto Provisioning ▾
- Oproepcontrole ▾
- Oproepfuncties ▾
- Messaging ▾
- PBX instellingen ▾
- Systeem ▾
- Beveiliging ▾
- Onderhoud ▾
- Integration ▾

17 Click "Wachtwoord voor opgevraagde trunk: 49PAXwNH"

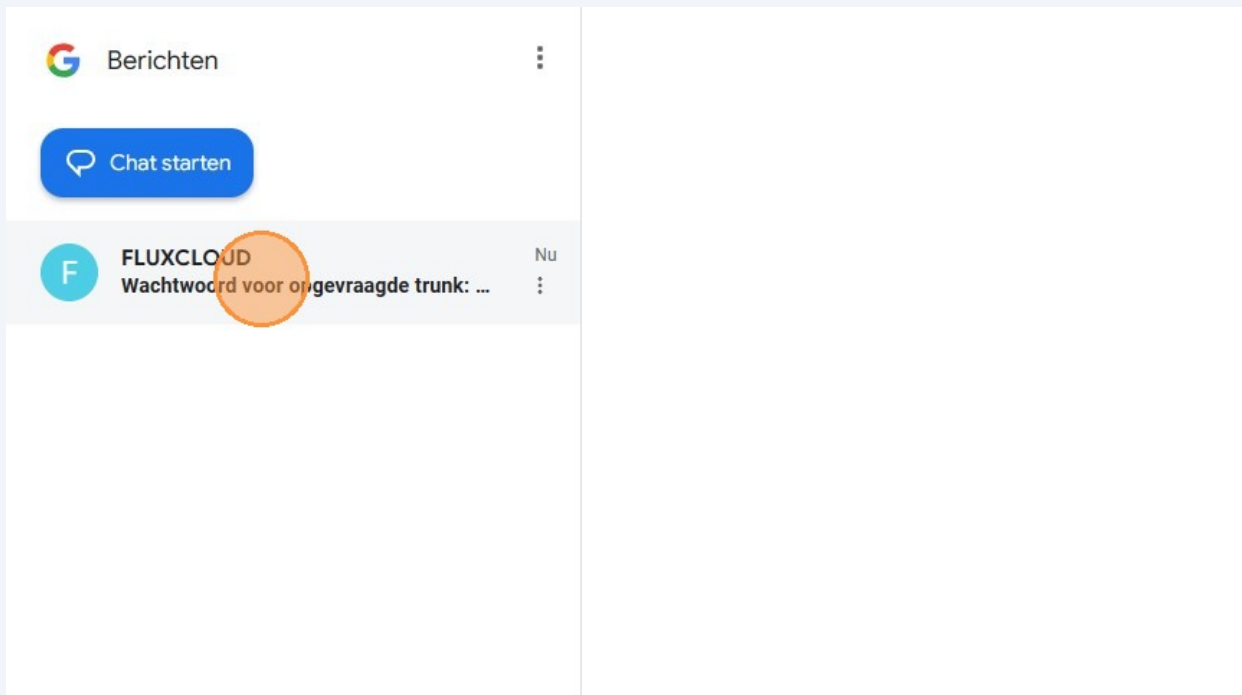

18 Fill in the password recieved on your mobile phone

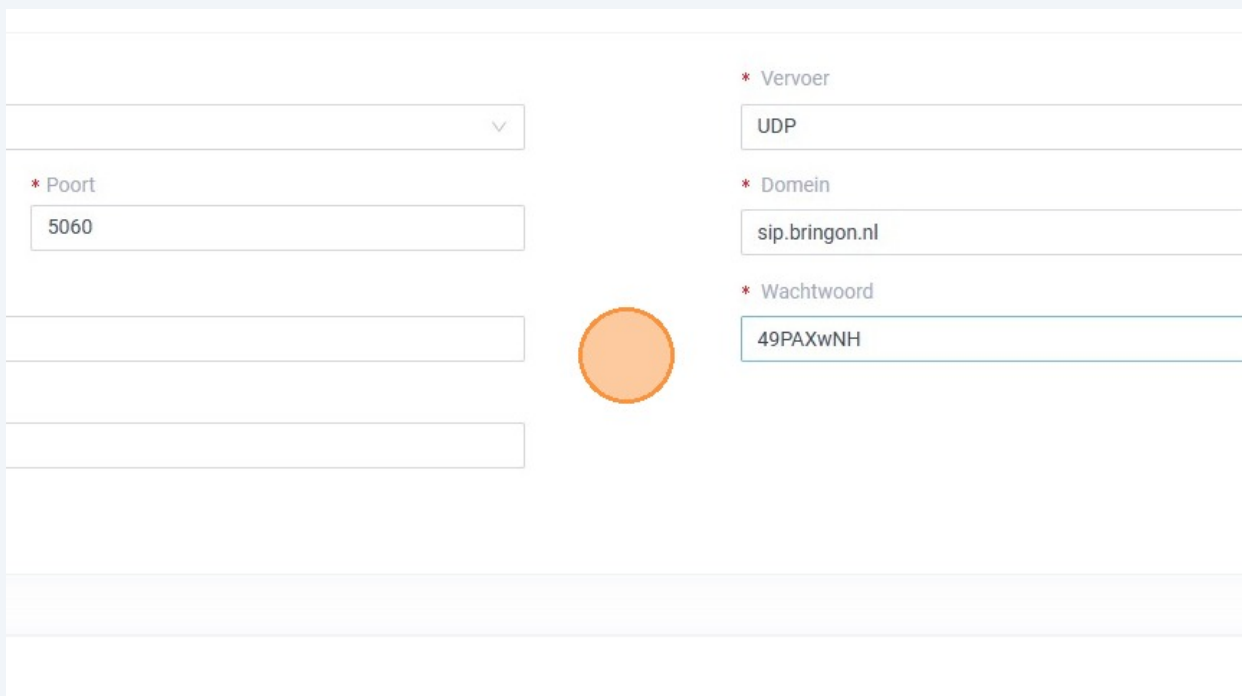

19 Click "DIDs/DDIs"

Your P-Series Cloud Edition trial will e

Extensies en Trunk / Trunk / **Toevoegen**

Basic Geavanceerd **DIDs/DDIs** Inkomende nummerherkenning opnieuw formatteren

* Naam
Hoofdtrunk

Selecteer ITSP-sjabloon
Algemeen.

Verzamel oproep

20 Click "Toevoegen"

Your P-Seri

Yeastar

Dashboard

Extensies en Trunk

Extension

Extensiegroep

Client Permission

Trunk

Rol

Contactpersonen.


Extensies en Trunk / Trunk / **Toevoegen**

Basic Geavanceerd **DIDs/DDIs** Inkomende nummerherkenni

+ Toevoegen Importeren Exporteren Verwijderen

<input type="checkbox"/>	DID/DDI	DID/DDI naam
--------------------------	---------	--------------

21 Click the "DID/DDI" field.

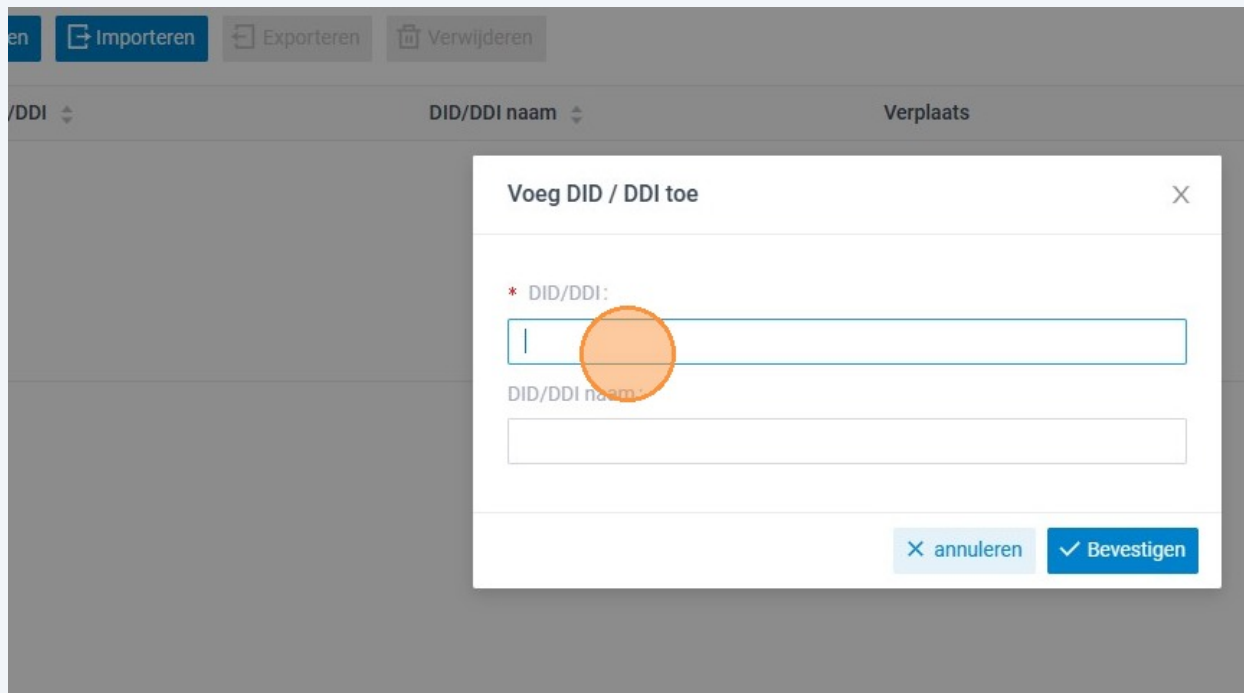


22 Type customers DID numbers (format: 31850123456)

23 Click "Bevestigen"

DID/DDI:

DID/DDI naam:

24 Click "Uitgaande beller-ID"

 Your P-Series Cloud Edition trial will end in 16/02/2024.

Inkomende nummerherkenning opnieuw formatteren	Uitgaande beller-ID	SIP-headers
--	----------------------------	-------------

25 Click the "Uitgaande Bel ID" field.

The screenshot shows a web interface for editing a trunk. On the left is a navigation menu with items: Dashboard, Extensies en Trunk (selected), Extension, Extensiegroep, Client Permission, Trunk, Rol, Contactpersonen., Auto Provisioning, and Oproepcontrole. The main content area is titled 'Extensies en Trunk / Trunk / Bewerk (Hoofdtrunk)'. It has four tabs: Basic, Geavanceerd, DIDs/DDIs, and Inkomende nummerherkenning. The 'Algemeen' section contains a text input field labeled 'Uitgaande Bel ID', which is highlighted with an orange circle. Below this is a section titled 'Lijst met uitgaande beller-ID's' with buttons for 'Toevoegen', 'Importeren', 'Exporteren', and 'Verwijderen'. A table below has columns for 'Uitgaande beller-ID' and 'Naam uitgaande beller-ID'.

26 Type customers DID numbers (format: 31850123456)

27 Click "Opslaan"

The screenshot shows a web application interface. On the left is a sidebar menu with the following items: Auto Provisioning, Oproepcontrole, Oproepfuncties, Messaging, PBX instellingen, Systeem, Beveiliging, Onderhoud, Migration, and Rapporten en opnames. The main content area displays a table with two columns: 'Uitgaande beller-ID' and 'Naam uitgaande beller-ID'. At the bottom of the main content area, there are two buttons: 'Opslaan' (highlighted with a red circle) and 'annuleren'.

28 Click "Van toepassing zijn"

The screenshot shows a web application interface. At the top, there is a date '16/02/2024.' and a search bar. Below the search bar, there is a navigation bar with a 'Van toepassing zijn' button (highlighted with a red circle) and several icons. The main content area displays a table with the following data:

rt	Gebruikersnaam	Uitgaande Bel ID	Activiteiten
060	815454	31850135532	

At the bottom of the table, there is a pagination control showing 'Totaal :1' and '1' in a box, with '20 / pagina' and a dropdown arrow.